



# KT-LALED-XA-WM-KIT

## WALL MOUNT KIT

### DESCRIPTION

Wall mount kit for Keystone Linta Series Architectural Pendant Fixtures

### APPLICATION

Fits all corresponding KT-LALED fixtures for wall mount applications

### PRODUCT FEATURES


Includes wall mount bracket, j-box cover, 5 wire wiring harness, mounting arms and hardware



### PRODUCT SPECIFICATIONS

CATALOG NUMBER	DESCRIPTION
KT-LALED-2A-WM-KIT	Wall Mounting Kit for 2' Fixtures. Includes 19.7in length 5 wire wiring harness
KT-LALED-3A-WM-KIT	Wall Mounting Kit for 3' Fixtures. Includes 31.5in length 5 wire wiring harness
KT-LALED-4A-WM-KIT	Wall Mounting Kit for 4' Fixtures. Includes 31.5in length 5 wire wiring harness
KT-LALED-8A-WM-KIT	Wall Mounting Kit for 8' Fixtures. Includes 59.0in length 5 wire wiring harness

### PHYSICAL SPECIFICATIONS

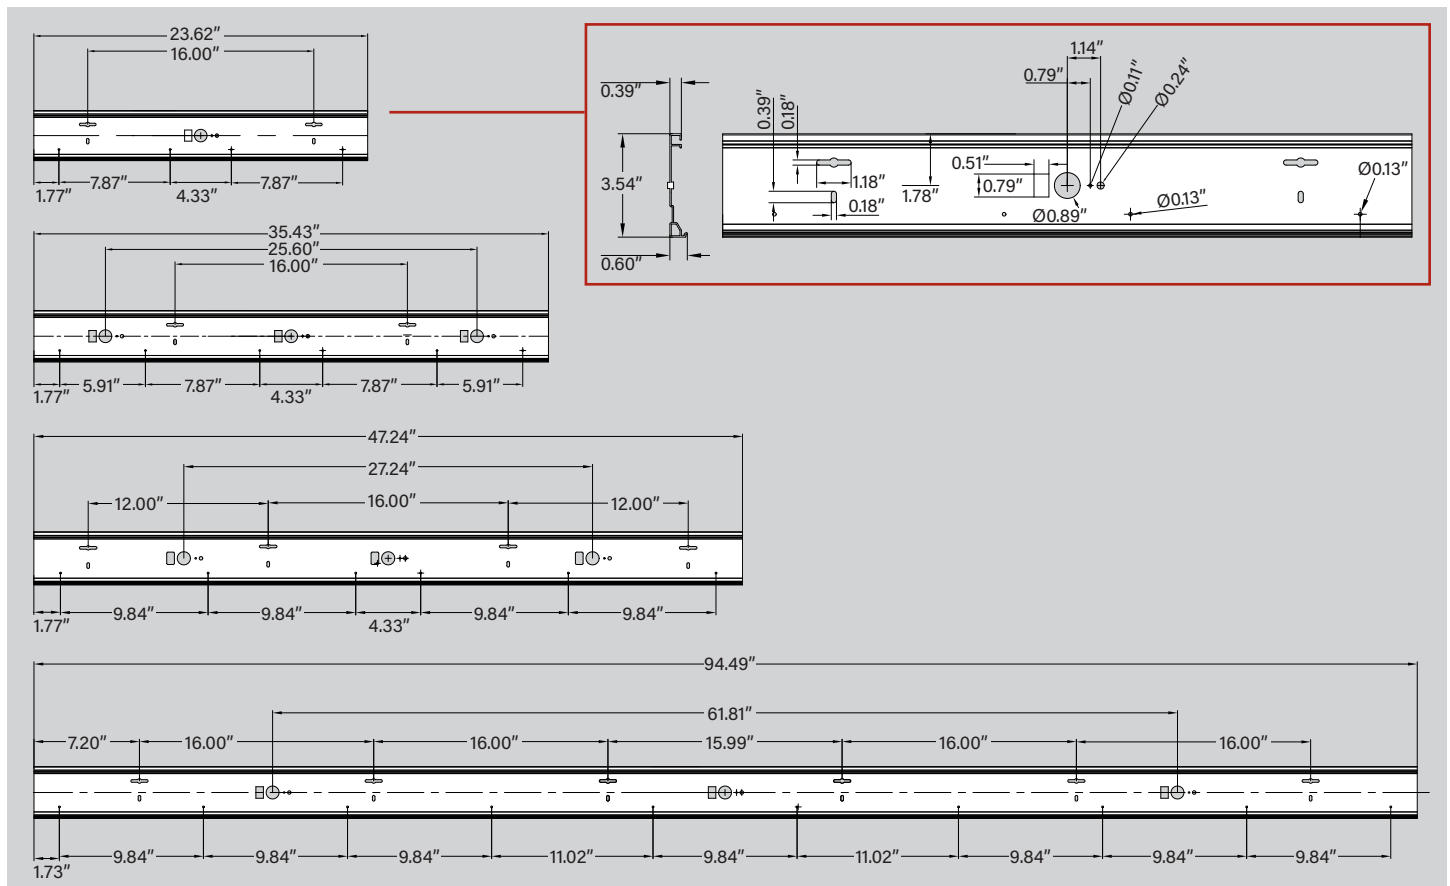


# KT-LALED-XA-WM-KIT


## WALL MOUNT KIT

### INSTALLATION INSTRUCTIONS


1. Measure the wall, mark the positions and drill holes accordingly. Ensure Power is turned off. Make wiring connection between input power feed and the input wiring harness supplied with the wall mount kit. Ensure all connections are tucked into the junction box. Push the bracket onto the wall and secure via screws (and drywall anchors if needed.)

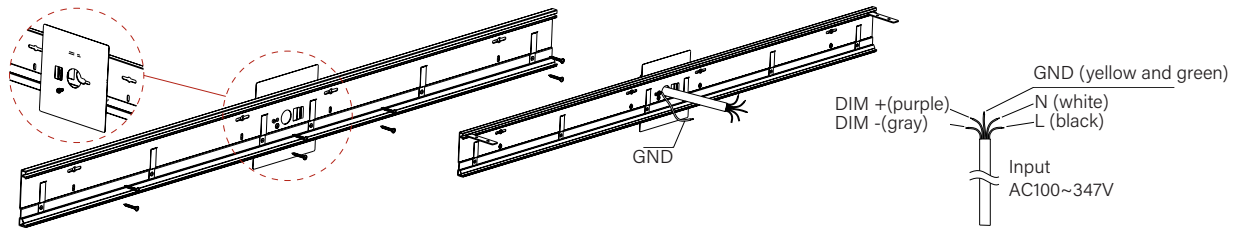


2. Ensure the wiring harness supplied with the wall mount kit is tucked into the clips on the wall mount bracket, and routed towards the "power feed" end of the fixture to be mounted. Leave 3-4 inches of the wire harness with the orange quick connectors overhanging the end of the bracket.

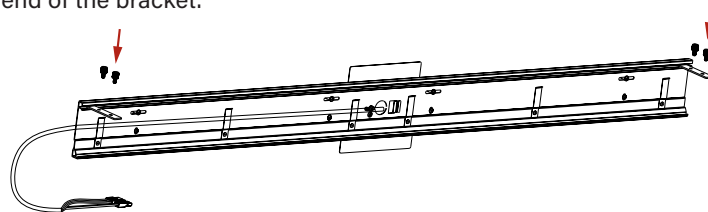

3. Set the fixture onto the wall mount bracket from the bottom side lip, and secure the top side by inserting the L brackets into the top of the wall mount bracket, and securing the to the fixture via the white hand screws. Remove the fixture end cap on both sides.

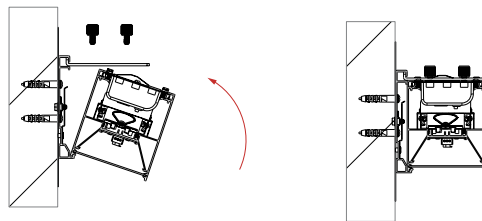

4. Connect wiring harness to fixture input wiring via supplied quick connects, through the open end cap on the fixtures power feed side. Ensure wiring is not pinched and the bend area is covered by the shrink wrap insulation. Install new wall mount bracket compatible end caps that came supplied with the kit.

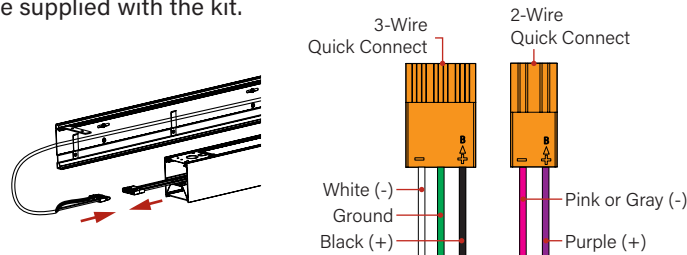

5. Adjust Wattage, CCT, and directional switches as needed. Restore power to the fixture.

**Note:** Fixtures can be linked end to end during wall mount installation, using additional wall mount brackets as needed for the fixture sizes to be linked. Standard fixture linking brackets do not need to be used. Optional KT-LALED-A-LBR-WM (linking Bracket for Wall Mount daisychain connections) is recommended between fixtures for optimal alignment.

**Note:** For daisy chain wall mount applications with a center power feed location, optional KT-LALED-WH-WM-20-KIT (20' long wiring harness) is recommended to use in place of standard wiring harness that comes with the wall mount kits

**Note:** For wall mount applications with Emergency Egress needs, optional KT-LALED-WH-WM-20EM-KIT (20' long 6 wire wiring harness) is recommended. Cut to length as needed.



# KT-LALED-XA-WM-KIT

## WALL MOUNT KIT

**ACCESSORIES**

CATALOG NUMBER		UPC	EASY CODE
KT-LALED-A-LBR-WM	Linking bracket for wall mount end to end daisy chain connections (Optional)	843654158464	WRU-16
KT-LALED-WH-WM-20-KIT	Extended length wire harness for wall mount kit, 20', 5 wire. For use with daisy chain wall mount installations with a center power feed location	843654158549	XGL-51
KT-LALED-WH-WM-20EM-KIT	Extended length wire harness for wall mount kit, 20', 6 wire. For use with daisy chain wall mount installations with a center power feed location for emergency backup needs (extra conductor for switch leg)	843654158556	SPM-05

**ORDERING INFORMATION**

CATALOG NUMBER	UPC	EASY CODE
KT-LALED-2A-WM-KIT	843654157894	NAJ-17
KT-LALED-3A-WM-KIT	843654157900	NOO-02
KT-LALED-4A-WM-KIT	843654156859	ARZ-81
KT-LALED-8A-WM-KIT	843654156866	EJW-29

**CATALOG NUMBER BREAKDOWN**

# KT-LALED-XA-WM-KIT

1
2
3
4
5
6
7

- 1** Keystone Technologies
- 2** Linear Architectural Fixture
- 3** LED
- 4** Nominal Size
- 5** Series/Form Factor
- 6** Wall Mount
- 7** Kit