

HTL68 SERIES TAPE LIGHT

24V Submersible High Output

For water features or wet location applications, the Submersible tape is a highly sought after solution. With an IP68 outdoor submersible rating, our submersible tape can withstand most natural elements and can be field cut for custom applications making for a great go to for small ponds and fountain lighting solutions.

- Available in 3000K and 4000K color temperatures
- Up to 94+ color rendering index
- Lumen output ranging from 270Lm to 335Lm per foot
- Consumes up to 4.6W per foot
- IP68 submersible rating allows for water feature applications
- Cuttable every 3.94" with 16.4ft max run
- Dimmable (5-100%) with most ELV, TRIAC dimmers
- cULus Listed for indoor and outdoor wet locations
- 50,000 hours rated life



PROJECT: _____

TYPE: _____

LOCATION: _____

CATALOG NUMBER: _____



HTL68 SERIES QUICK SPECS	
VOLTAGE	24V DC
WATTAGE	4.6W / ft
LUMENS	Up to 335Lm / ft
CCT	3000K / 4000K
CRI	94+
MAX RUN	16.4ft
CUTTING POINTS	*3.94" (100mm) - (Must be properly sealed)
IP RATING	IP68 - Encased
DIMMING	TRIAC / ELV (5 - 100%)
DIMENSIONS	12.5mm (0.49") W x 6mm (0.24") H
BEAM ANGLE	120°
OPERATING TEMP	5°C (41°F) to 70°C (158°F)
CERTIFICATIONS	cULus Listed - Damp / Wet Location
RATED LIFE	50,000 Hours

HTL68 SERIES IP RATINGS




IP68 (Encased)*

Fully encased tape light in silicone injected jacketing that allows for wet location applications.

Best suited: Indoor & Outdoor wet locations

*Not intended for long-term submersion nor submersion greater than 1M in depth. Not intended for use in swimming pools or other water features where humans and/or animals may enter the water. Not suitable for exposure to chemicals or salt.

HTL68 SERIES QUICK LOOK

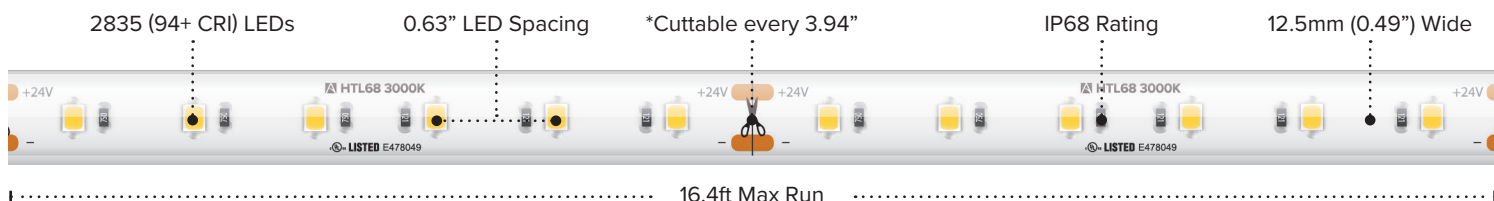


HTL68 SERIES ORDERING INFORMATION

ITEM NUMBER	VOLTAGE	CCT	LENGTH	LUMENS / FT	WATTAGE / FT	IP RATING	CRI	CUTTING	MAX RUN
HTL68-WW	24V DC	3000K	16.4 ft	270Lm / ft	4.6W / ft	IP68	94+	3.94" (100mm)	16.4 ft
HTL68-WH	24V DC	4000K	16.4 ft	335Lm / ft	4.6W / ft	IP68	94+	3.94" (100mm)	16.4 ft


16.4ft Reels (IP68) Include: Attached 16.25" IP68 Power Feed + 72" Mating IP68 conkit / (15) Saddle Mounting Clips / (2) End Caps

HTL68-RGB SERIES ACCESSORIES

ITEM NUMBER	DESCRIPTION
TL-2JUMP68-10	10ft Extension Cable (IP68)
TL-2JUMP68-20	20ft Extension Cable (IP68)
TL-CLIPS-15	IP68 Mounting Clips - Qty 15
TL-LCLIPS-15	IP68 "L" Mounting Clips - Qty 15
WIRE-15-2PIN	15ft (20/2) Wire Spool
WIRE-CMP-100-3PIN	100ft (16/3) In-wall Rated Wire Spool

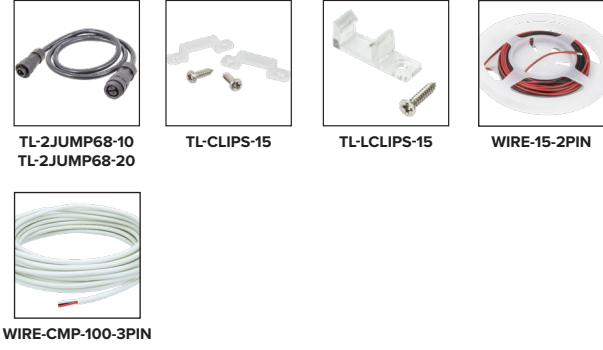

TLH68 SERIES QUICK SET-UP

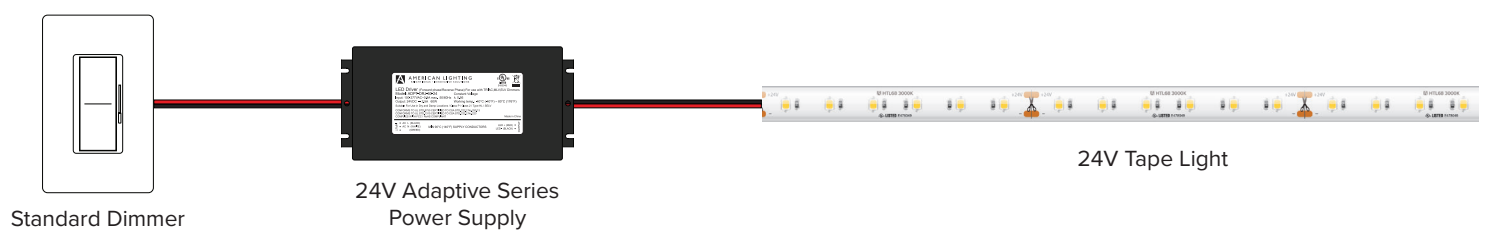

RECOMMENDED POWER SUPPLIES

ITEM NUMBER	DESCRIPTION	MAX / MIN LOAD	INPUT VOLTAGE	OUTPUT VOLTAGE	DIMMABLE	DIMENSIONS
ADPTPRO-DRJ-30-24	Adaptive Pro Series 30W	30W / 3W	100-277V AC	24V DC	Yes*	6.49"L x 3.6"W x 1.02"H
ADPTPRO-DRJ-60-24	Adaptive Pro Series 60W	60W / 6W	100-277V AC	24V DC	Yes*	7.44"L x 3.77"W x 1.73"H
ADPTPRO-DRJ-96-24	Adaptive Pro Series 96W	96W / 9.6W	100-277V AC	24V DC	Yes*	8.70"L x 3.77"W x 1.73"H
ADPTPRO-DRJ-192-24	Adaptive Pro Series 192W (2 x 96W)	192W / 19.2W	100-277V AC	24V DC	Yes*	10.94"L x 4.33"W x 1.88"H
ADPTPRO-DRJ-288-24	Adaptive Pro Series 288W (3 x 96W)	288W / 28.8W	100-277V AC	24V DC	Yes*	11.92"L x 4.33"W x 1.88"H
ADPTPRO-200-24	Adaptive Pro Series 200W	200W / 20W	100-277V AC	24V DC	Yes*	10.07"L x 3.07"W x 1.85"H
ADPTPRO-300-24	Adaptive Pro Series 300W	300W / 30W	100-277V AC	24V DC	Yes*	10.86"L x 3.07"W x 1.85"H

5-in-1 Dimming Compatible With Most MLV, ELV, and TRIAC Dimmers



AMERICAN LIGHTING WARRANTY

LIMITED WARRANTY FOR LED PRODUCTS: 5 YEARS

AVERAGE LIFE

Average incandescent lamp life, rated life and average life are terms used to describe the number of hours at which half of the lamps have failed. For LEDs, the hours of rated life specify the point at which 70% of original lumen output is reached. Below this point, the effective life is over, however, the LED may still emit light. Individual results may vary with actual environmental conditions including, but not limited to, proper installation, ambient temperature and/or input voltage fluctuations.

Warranty life based on average 8 hours/day use, 7 days/week. Product should be cycled off for at least 6 hours per day.

SAFETY

You must disconnect lighting products from the power supply before servicing or replacing bulbs. Only qualified personnel should install and perform service on lighting products. Periodic inspection and maintenance is required to keep equipment operating properly and at peak performance. Do not mount fixtures on or adjacent to combustible materials.

Lighting products may present a possible shock or fire hazard if improperly installed or attached in any way. Products should always be installed in accordance with their instruction manuals, current electrical codes, and/or the current National Electric Code (NEC). Code compliance is the sole responsibility of the person, company, or party performing the installation of product. Failure to comply with national and/or regional safety codes may result in hazardous or dangerous conditions, damage to property or life, and/or altered product performance/specifications.

LIMITED PRODUCT WARRANTY

Our products are warranted to be free from defects in material and workmanship for the warranty period listed on the reverse by product category. Warranty periods begin from the date of shipment from American Lighting Inc's warehouse to the original purchaser. Products that prove to be defective during their specific warranty period will be either repaired or replaced, at the sole discretion of American Lighting Inc. Claims for defective products must be submitted in writing to American Lighting Inc's RGA Department within the warranty period. Upon approval of such return, American Lighting Inc reserves the right to inspect the product for misuse or abuse. Claims for indirect or consequential damages or for any product that, in American Lighting Inc's opinion, has been misused will be denied. This is a warranty of product reliability only and not a warranty of merchantability or fitness for a particular purpose. American Lighting Inc shall have no liability whatsoever in any event for payment of incidental or consequential damages, including, without limitations, installation costs and/or damages for personal injury and/or property. These products may represent a possible shock or fire hazard if improperly installed or altered in any way. This warranty does not apply to any product that has not been properly installed in accordance with current local codes and/or the National Electrical Code. Products that require a transformer, driver or power supply must be used in conjunction with American Lighting Inc's recommended power supply to ensure safety and retain product warranty. Limited Product Warranty applies to lengths up to 75 feet for rope light products.

STANDARD LINEAR WARRANTY

Rope light and linear lighting products in all their various types and shapes, whether LED or incandescent, are wired in series parallel. This means that several individual lamps or LEDs are wired together in series to equal 12V, 24V or 120V. Then these sections are wired together (in parallel) to light up in unison. If one solder joint, lamp or resistor fails, a whole section will not light. Due to the number of elements involved, and the numerous extenuating circumstances beyond our control, American Lighting Inc offers a [Standard Linear Warranty](#) on most linear lighting products. The limited liability warranty is listed above, however the Standard Linear Warranty offers replacement product by section due to defective material and/or workmanship for one year beginning from the date of shipment from American Lighting Inc's warehouse to the original purchaser.

USE OF LINEAR LIGHTING IN OUTDOOR APPLICATIONS

Incandescent rope light and LED Flexbrite UL 2388 custom cuts; incandescent and LED Flexbrite pre-packaged kits; and UL Listed (special order) cuts of LED Neon Flexbrite Plus and Economy have factory assembled power connections and end caps that seal the rope from moisture. Due to strict quality control standards, American Lighting is able to offer a limited warranty on these items rather than the standard linear lighting warranty that replaces product by defective section only. For outdoor applications, best practices include using kits interconnected (same length kits are best for color control of White LED Flexbrite) or using custom cuts that do not exceed 75 feet.

For all linear lighting categories, any non-rated field connection made in an outdoor application should be properly sealed with dielectric grease covering all conductive materials; and properly installed power connections and end caps, sealed with dielectric grease, silicone, and heat shrink tube. However, since non-rated (field executed) power connections of linear lighting products cannot be quality controlled, and outdoor use of non-rated product is not recommended, American Lighting cannot warrant the product to any purchaser.

PRODUCT SPECIFICATIONS

For the latest product information, updates, instructions and details concerning specifications, colors, finishes, performance, installation and design, visit www.americanlighting.com. Color may vary from the color printed herein due to limitations in photographic and printing processes. American Lighting Inc. reserves the right to change product specifications without notice. Other product specifications such as color temperature, wavelength characteristics and lumen output are subject to production limitations and may vary.

LED technology is changing rapidly, and not all color temperatures and performance levels can be duplicated at a later time. Best practices include purchasing 10-15% additional product for a project on the same initial order where white LED color temperatures must be maintained over project and product life. Eventual product replacement should be considered at layout and design stages. Best practices also include testing connections and product performance prior to mounting and/or installing.