



LOCATION		DATE
PREPARED BY		QUANTITY
COMMENTS		FIXTURE TYPE
CATALOG NUMBER		

Features

This ultra low profile design provides a dramatic look and frameless construction. Products can be used in various applications including corridors, closets, hallway, kitchen and anywhere general lighting is needed. Indoor use only - Wall or ceiling mount. Outdoor use only - Covered ceiling mount.



Construction


Edge-lit technology housing is injection molded with aluminum backplate. Twist-N-Lock Mounts to standard junction box (not included). Power supply connections must be made inside junction box.

Finish

White finish.

Diffuser

White acrylic diffuser.

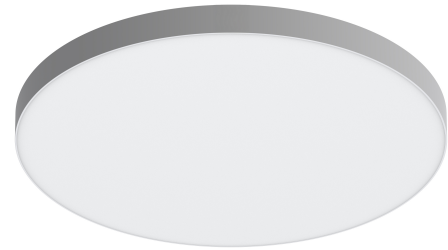

Electrical

Input 120 VAC 60 HZ. (D1)
Input 120-277V (D4)
Compatible with residential (TRIAC/ELV) dimmers.

LED

Fixture includes a LED modules capable of producing:
9W = 550 delivered lumens
11W = 1200 delivered lumens
18W = 1600 delivered lumens
24W = 2150 delivered lumens
28W = 2500 delivered lumens
Adjustable 2700K, 3000K, 3500K, 4000K, 5000K (CCT).
Rated for 50,000 Hrs. 90 CRI.

Certification

cETLus listed
Title 24/JA8 Compliant
Wet location rated for indoor use. Outdoor wet location rated for covered ceiling mount applications ONLY (not recommended for any other outdoor use). Suitable for use in clothes closets when installed in accordance with the NEC 410.16 spacing requirements.

Warranty

Limited warranty: This fixture is free from defects in materials and workmanship for a period of 5 years from date of purchase.

Specifications and dimensions
subject to change without notice.



Ordering Information:

White	LED	Delivered Lumens	Adjustable CCT	DIA.	D
BRMF05LAJD1WH	9W	550	2700K/3000K/3500K/4000K/5000K	5-3/8"	1"
BRMF07LAJD4WH	11W	1200	2700K/3000K/3500K/4000K/5000K	7"	1"
BRMF09LAJD4WH	18W	1600	2700K/3000K/3500K/4000K/5000K	8-7/8"	1"
BRMF12LAJD4WH	24W	2150	2700K/3000K/3500K/4000K/5000K	11-3/4"	1"
BRMF14LAJD4WH	28W	2500	2700K/3000K/3500K/4000K/5000K	13-7/8"	1"