

Emergency and Exit Lights Wet Location Rated

FEATURES:

- High impact UV stabilized flame rated thermoplastic housing UL94 V-0 (High Capacity 5VA)
- 120V or 277V AC input
- Nickel Cadmium (NiCad) battery meets UL 90 minute emergency lighting requirement
- Test switch and AC-On indicator included
- Heads fully adjustable up, down and side to side
- Self Diagnostic option available
- Operating temperatures - High Capacity 10°C-40°C, general Indoor 20°C-30°C
- White finish standard, Black available as special order
- AC versions available as special order
- Single or double face with removable chevrons for Exit/Combo signs
- White finish standard, Black available as special order for Emergency Lights

CERTIFICATIONS:

- UL924 Listed for Wet Locations, WL suffix = listed for Wet Locations

WARRANTY:


5-year standard warranty* (further details available at www.maxlite.com/warranties)

*Product may be eligible for a warranty extension to 10 years, for an additional fee. Contact MaxLite for details.

EMERGENCY LIGHT WET LOCATION RATED




EML-2HMW-WL
EML-2HMW-WL2

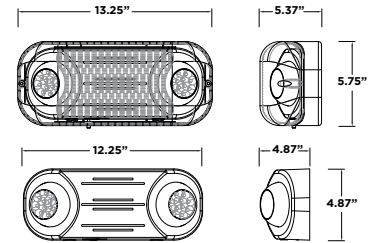

EMERGENCY LIGHT HIGH CAPACITY, 2 HEADS - WET LOCATION RATED




EML-2HWHC-WL
EML-2HWHCRC-WL

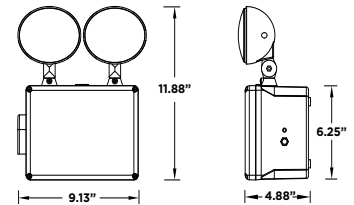


REMOTE HEADS (HIGH CAPACITY ONLY)* - WET LOCATION RATED



ERO-SWHC

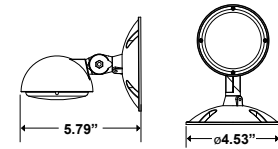

ERO-2HWHC

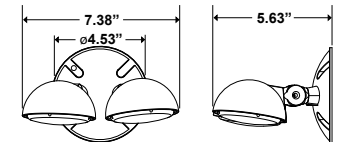


*Please see fixture compatibility chart below


EXIT SIGNS - WET LOCATION RATED



EX-RW-WL

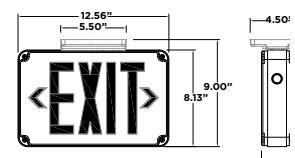

EXC-GW-WL

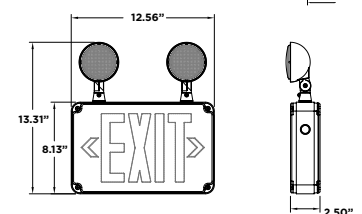

Emergency and Exit Lights Wet Location Rated

EMERGENCY LIGHT WET LOCATION ORDERING:

PRODUCT IMAGE	ORDER NUMBER	MODEL	DESCRIPTION	PERFORMANCE
	109731	EML-2HMW-WL	Emergency Light LED, 2 MR16 Heads, White, 120v Or 277v, Battery Backup, Wet Locations	58 lumen per head, 1.9W (120/277V) draw
	109732	EML-2HMW-WL2	Emergency Light LED, 2 MR16 Heads, White, 120v Or 277v, Battery Backup -20°C, Wet Locations	58 lumen per head, 1.9W (120/277V) draw
	109733	EML-2HWHC-WL	Emergency Light LED, 2 Heads, White, High Capacity, High Lumen Output, Battery Backup, Wet Locations	78 lumens per head, 4.4/4.5W (120/277V) draw
	109734	EML-2HWHCRC-WL	Emergency Light LED, 2 Heads, White, High Capacity, Remote Capable Up To 6 Heads, Battery Backup, Wet Locations	78 lumens per head, 4.4/4.5W (120/277V) draw, up to 12 additional remote heads




REMOTE HEADS LIGHT WET LOCATION ORDERING:







PRODUCT IMAGE	ORDER NUMBER	MODEL	DESCRIPTION	PERFORMANCE
	109735	ERO-SWHC	Emergency Remote Head, Outdoor (WL), Single, White, High Capacity Only	72 lumens, 3.6V, 1.17W, WL listed
	109736	ERO-2HWHC	Emergency Remote Head, Outdoor (WL), Double, White, High Capacity Only	72 lumens - per head, 3.6V, 1.17W - per head, WL listed

EMERGENCY SIGNS WET LOCATION ORDERING

PRODUCT IMAGE	ORDER NUMBER	MODEL	DESCRIPTION	PERFORMANCE
	109737	EX-GW-WL	Exit, Thermoplastic, Green Letters, White, Battery Backup, Wet Locations	-
	109738	EX-GWRC-WL	Exit, Thermoplastic, Green Letters, White, Battery Backup, Remote Capable Up To 2 Heads, Wet Locations	-
	109739	EX-GW-WL2	Exit, Thermoplastic, Green Letters, White, Battery Backup -20°C, Wet Locations	-
	109740	EX-RW-WL	Exit, Thermoplastic, Red Letters, White, Battery Backup, Wet Locations	-
	109741	EX-RWRC-WL	Exit, Thermoplastic, Red Letters, White, Battery Backup, Remote Capable Up To 2 Heads, Wet Locations	-
	109742	EX-RW-WL2	Exit, Thermoplastic, Red Letters, White, Battery Backup -20°C, Wet Locations	-
	109743	EXC-GW-WL	Exit Emergency Combo, Thermoplastic, Green Letters, White, Battery Backup, Wet Locations	63 lumen per head, 3.08W (120/277V) draw
	109744	EXC-GWRC-WL	Exit Emergency Combo, Thermoplastic, Green Letters, White, Battery Backup, Remote Capable Up To 2 Heads, Wet Locations	63 lumen per head, 3.08W (120/277V) draw
	109745	EXC-RW-WL	Exit Emergency Combo, Thermoplastic, Red Letters, White, Battery Backup, Wet Locations	63 lumen per head, 1.89W (120/277V) draw
	109746	EXC-RWRC-WL	Exit Emergency Combo, Thermoplastic, Red Letters, White, Battery Backup, Remote Capable Up To 2 Heads, Wet Locations	63 lumen per head, 1.89W (120/277V) draw
	109747	EXC-RW-WL2	Exit Emergency Combo, Thermoplastic, Red Letters, White, Battery Backup -20°C, Wet Locations	63 lumen per head, 1.89W (120/277V) draw

Emergency and Exit Lights Wet Location Rated

REMOTE HEAD COMPATABILITY:		EMERGENCY LIGHTS # OF REMOTE HEADS SUPPORTED	
		 EML-2HWHCRC-WL	
REMOTE HEADS			
 ERO-SWHC		12	
 ERO-2HWHC		6	

REMOTE HEAD COMPATABILITY:		EXIT LIGHTS # OF REMOTE HEADS SUPPORTED			
		 EX-GWRC-WL	 EX-RWRC-WL	 EXC-GWRC-WL	 EXC-RWRC-WL
REMOTE HEADS					
 ERO-SW		2	2	2	2
 ERO-2HW		1	1	1	1