

Type:

Model:

## CABANA LED MR16 Wall Sconce

**ORDERING CODE:**

490090

**SPECIFICATIONS**

**HOUSING:**

Cast brass. Fully potted, threaded cap with O-rings.

**FINISH:**

Weathered brass. Custom powder coated colors available.

**LENS:**

Clear tempered.

**SOCKET/LAMP HOLDER:**

Two fixed ceramic bi-pin socket with stainless steel retaining springs.

**IP RATING:**

IP66 Rated

**LAMP TYPE:**

Two 12V MR16. LED recommended. 35W halogen or 7W LED maximum.

**MOUNTING:**

Surface mount.

**WIRING:**



Pre-wired with 25' pigtail of 18/2 cable.

**WARRANTY:**

Lifetime.



The cast brass Cabana up-and-down wall sconce utilizes two MR16 LED lamps to provide a wide range of effects. By choosing the desired lamp options, you can set the intensity, warmth (from moonlight to firelight), and beam coverage (from 15° to 40°).

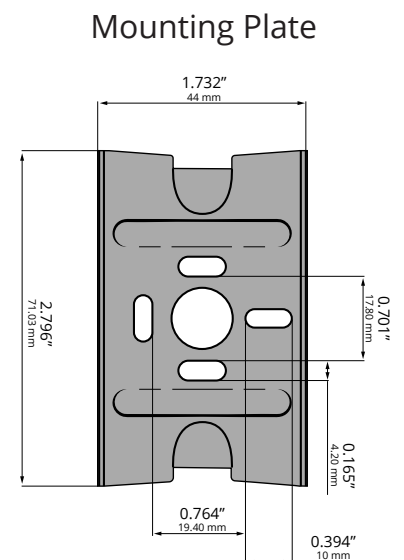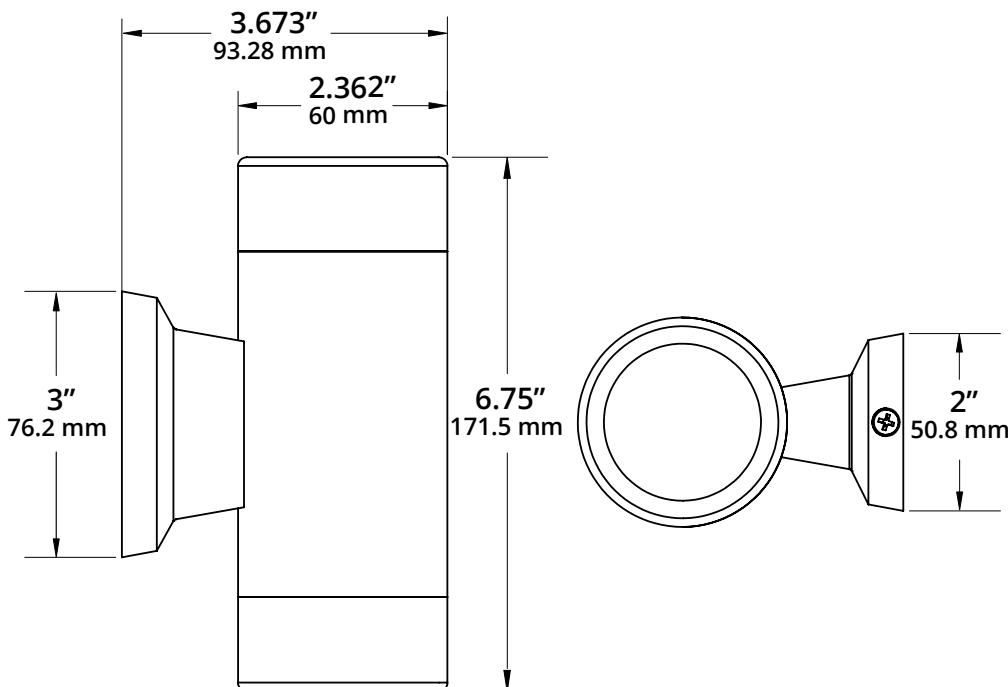

LED LAMP SPECIFICATIONS

**LAMP TYPE:**

Two 12V Dauer MR16 lamp with 5-year warranty, dimmable, and suitable for enclosed luminaires.

**OPTICS:**

Integral optics providing available beam spreads from 15° to 120°.

**COLOR TEMPERATURES:**

Color temperature options provide the following qualities: 2700K or 3000K. Decorative color light options include amber, blue, green, red and purple.



FIXTURE ORDERING INFORMATION

To order a lamped fixture with mounting options, select the appropriate choice from each column as in the following example:

EXAMPLE: 490090-MR16-4W-25-2700K

| FIXTURE |         | LAMP                         |                            |
|---------|---------|------------------------------|----------------------------|
| 490090  | WATTAGE | BEAM SPREAD                  | COLOR TEMP.                |
|         | 2W      | 25° / 40° / 60° / 100°       | 2700K / 3000K              |
|         | 3W      | 25° / 40° / 60°              | 2700K / 3000K              |
|         | 4W      | 25° / 40° / 60° / 100°       | 2700K / 3000K              |
|         | 5W      | 15° / 25° / 40° / 60° / 100° | 2700K / 3000K              |
|         |         | 25°                          | Amber / Blue / Green / Red |
|         | 5W      | 38°                          | Purple                     |
|         | 6W      | 25° / 40° / 60°              | 2700K / 3000K              |
|         | 7W      | 15° / 30° / 45° / 60° / 120° | 2700K / 3000K              |